







_Characteristics



ELECTRONIC AUTO-LEVEL

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



ACTIVATED ELECTRONIC PRE-INFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



DOUBLE READING GAUGE Allows to control at the same time

the boiler pressure and the distribution pressure.



EASY SERVICE

Fast access to the internal parts for quick and easy technical service




AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.



_Versions

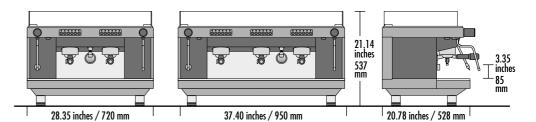

group SED/SAP

2 steam tap	S
-------------	---

1 water tap

1 one-cup portafilters

2 two-cup portafilters

3 group SED/SAP

2 steam taps

1 water tap

1 one-cup portafilters

3 two-cup portafilters



_Technical data		1 group	2 group	3 group	compact
voltage	V		220-240 1N /	380-415 3N	
power imput	kW	2.7	3.3	6	2.3
steam boiler capacity	US gal / It	1.85 / 7	2.64 / 10	3.7 / 14	1.19 / 4.5
steam boiler power	kW	2.5	2.95	5.6	2.15
pump power	kW	0.13	0.13	0.13	0.13
net weight	lb / kg	99 / 45	121 / 55	152 / 69	90 / 41



<u>(</u> (

All content is subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics, contents, and images indicated above. Last update 2023-5-14

REACH US

Mobile number: +966 53 885 9093

Website: www.rfa-sa.com , https://sanremosaudiarabia.com/

Online shop: https://shop.rfa-sa.com/ Email: customer-service@rfa-sa.com

Location: Al Thumama, Riyadh, Saudi Arabia











